


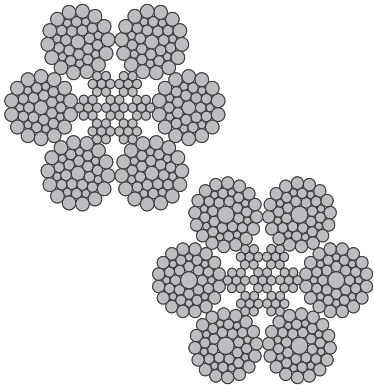

6 x 36 IWRC Class Wire Rope

6 Outer Strands, Rotation Wire Rope

Includes 6x36WS & 6x41SFW construction types. A good general purpose crane wire rope which is flexible and wear resistant. Suitable for lifting slings, winch lines, mooring lines, overhead crane ropes, piling and cranes.


6x36WS (14+(7+7)+7+1) IWRC, Load bearing outer wires 216

6x41WS (16+(8+8)+8+1) IWRC, Load bearing outer wires 246

Fill factor 0.59

Use of swivel is **not** permitted.

Diameter Inches	Weight per Foot Pounds	Grade Tensile	Bright		Galvanized	
			Wesco Stock Code	Minimum Strength Pounds	Wesco Stock Code	Minimum Strength Pounds
1/4	0.12	EIPS	W63608A1	6,880	W63608B1	6,190
5/16	0.18	EIPS	W63610A1	10,540	W63610B1	9,480
3/8	0.26	EIPS	W63612A1	15,100	W63612B1	13,590
7/16	0.35	EIPS	W63614A1	20,400	W63614B1	18,360
1/2	0.46	EIPS	W63616A1	26,600	W63616B1	23,940
9/16	0.59	EIPS	W63618A1	33,600	W63618B1	30,240
5/8	0.72	EIPS	W63620A1	41,200	W63620B1	37,080
11/16	0.85	EIPS	W63622A1	54,800	W63622B1	49,394
3/4	1.04	EIPS	W63624A1	58,800	W63624B1	52,920
13/16	1.19	EIPS	W63626A1	76,100	W63626B1	68,554
7/8	1.42	EIPS	W63628A1	79,600	W63628B1	71,640
15/16	1.59	EIPS	W63630A1	91,500	W63630B1	82,350
1	1.85	EIPS	W63632A1	103,400	W63632B1	93,060
1-1/16	2.02	EIPS	W63634A1	123,800	W63634B1	111,507
1-1/8	2.34	EIPS	W63636A1	130,000	W63636B1	117,000
1-1/4	2.89	EIPS	W63640A1	159,800	W63640B1	143,200
1-1/4	2.89	EEIPS	W63640A1- EEIPS	173,044	~	~
1-3/8	3.5	EIPS	W63644A1	192,000	W63644B1	172,800
1-1/2	4.16	EIPS	W63648A1	228,000	W63648B1	205,200
1-1/2	4.16	EEIPS	~	~	W63648B1- EEIPS	250,800
1-5/8	4.88	EIPS	W63652A1	264,000	W63652B1	237,600
1-3/4	5.67	EIPS	W63656A1	306,000	W63656B1	275,400
1-3/4	5.67	EEIPS	~	~	W63656B1- EEIPS	336,600
1-7/8	6.50	EIPS	W63660A1	348,000	W63660B1	313,200
2	7.39	EIPS	W63664A1	396,000	W63664B1	356,400
2	7.39	EEIPS	~	~	W63664B1- EEIPS	435,000
2-1/4	9.36	EIPS	W63672A1	494,000	W64172B1	444,600
2-1/2	11.6	EIPS	W63680A1	604,000	W64180B1	543,000

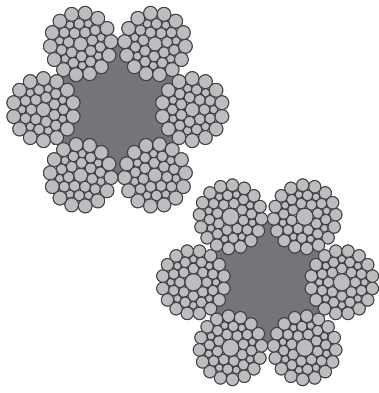

6 x 36 FC Class Wire Rope

6 Outer Strands, Rotation Wire Rope

Includes 6x36WS & 6x41SFW construction types. A good general purpose crane wire rope which is flexible and wear resistant. Suitable for lifting slings, winch lines, mooring lines, overhead crane ropes, piling and cranes.

6x36WS (14+(7+7)+7+1) FC, Load bearing outer wires 216

6x41WS (16+(8+8)+8+1) FC, Load bearing outer wires 246

Fill factor 0.50

Use of swivel is **not** permitted.

Diameter Inches	Weight per Foot Pounds	Grade Tensile	Bright		Galvanized	
			Wesco Stock Code	Minimum Strength Pounds	Wesco Stock Code	Minimum Strength Pounds
1/4	0.11	EIPS	W63608C1	6,040	W63608D1	5,436
5/16	0.16	EIPS	W63610C1	9,380	W63610D1	8,442
3/8	0.24	EIPS	W63612C1	13,420	W63612D1	12,078
7/16	0.32	EIPS	W63614C1	18,180	W63614D1	16,362
1/2	0.42	EIPS	W63616C1	23,600	W63616D1	21,240
9/16	0.53	EIPS	W63618C1	29,800	W63618D1	26,820
5/8	0.66	EIPS	W63620C1	36,600	W63620D1	32,940
3/4	0.95	EIPS	W63624C1	52,400	W63624D1	47,160
7/8	1.29	EIPS	W63628C1	70,800	W63628D1	63,720
1	1.68	EIPS	W63632C1	92,000	W63632D1	82,800
1	1.68	EEIPS	~	~	W63632D1- EEIPS	92,000
1-1/8	2.13	EIPS	W63636C1	115,800	W63636D1	104,220
1-1/4	2.63	EIPS	W63640C1	142,000	W63640D1	127,800
1-3/8	3.18	EIPS	W63644C1	170,800	W63644D1	153,720
1-1/2	3.78	EIPS	W63648C1	202,000	W63648D1	181,800
1-5/8	4.4	EIPS	W63652C1	236,000	W63652D1	212,400
1-3/4	5.15	EIPS	W63656C1	272,000	W63656D1	244,800
1-7/8	5.91	EIPS	W63660C1	310,000	W63660D1	279,000
2	6.72	EIPS	W63664C1	352,000	W63664D1	316,800
2-1/4	8.51	EIPS	W63672C1	440,000	W63672D1	396,000
2-1/2	10.50	EIPS	W63680C1	538,000	W63680D1	484,200

