


ProCraft JTHH Electric Single Phase Chain Hoists

Main features include:

- High quality Hoist with UL Certification
- Durable construction, powerful motor and highly efficient
- Optional voltages 110~120 / 220 ~ 240V
- Overload protection and heavy duty, durable Grade 100 Chain
- Key safety features such as all-way limit switches, emergency stop, and automatic brake system
- Heavy duty pendant control with emergency stop
- H4 load level and service life. High-volume handling of heavy loads, frequently near rated load in steel warehousing, machine and fabricating shops, mills, and foundries, with total running time not more than 50% of the work period as per ASME HST-1-2012.
- The electromagnetic brake system is tested at 125% of the hoist capacity and is designed to automatically engage immediately upon any loss of power.
- Meets US and EU Standards ASME HST-1, ASME B30.16, EN14492-2, EN60204-3



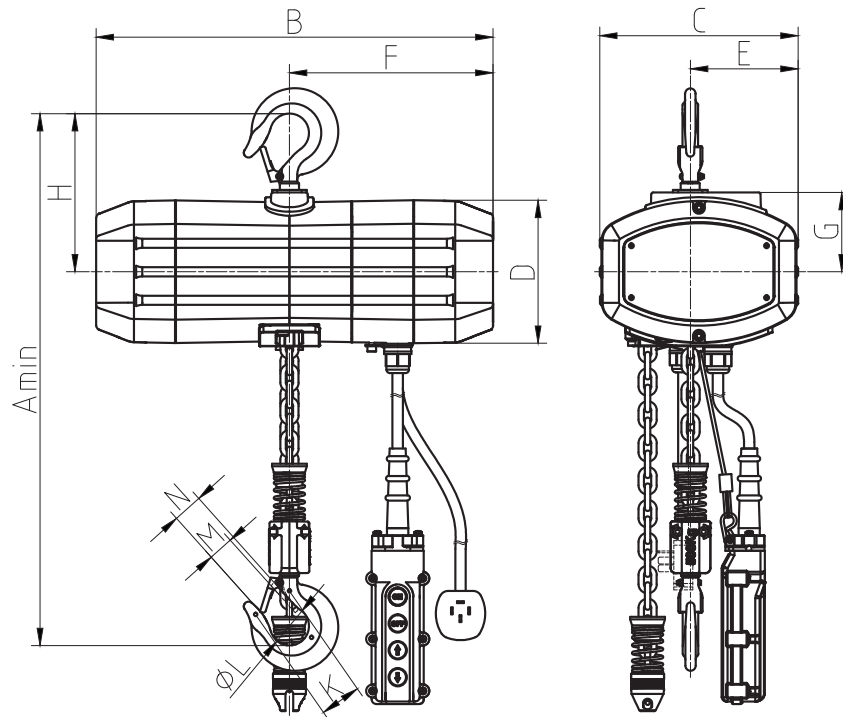

Model	Capacity Ton	Lifting Speed (ft / min)	Min. distance between hooks (inches)	Motor Power (kw)	Load continu- ity rate (%)	Load chain d x p (mm)	Weight Pounds	Extra weight per foot (lbs)
91ELC- PRJT05201S	0.5	16	17.9	0.5	30	6.3 x 19	88.2	0.60
91ELC- PRJT10201S	1.0	16	21.5	1.3	30	8 x 24	149	0.95

Model	Inches											
	A	B	C	D	E	F	G	H	L	K	M	N
91ELC- PRJT05201S	17.7	18.6	9.0	6.5	4.9	9.3	3.6	6.6	1.6	1.8	1.1	1.2
91ELC- PRJT10201S	21.4	19.4	11.6	7.6	6.7	9.7	4.5	7.8	1.8	1.9	1.2	1.4

Standard height 20 feet

Control voltage 24V

Frequency 60Hz

Operating temperatures -20 to 40° C (-4 to 104° F)

Using power single phase / 220 volt

The parameters listed in above table may change due to continuous improvement of our products.