


THIMBLES are designed and manufactured to protect wire rope from wear and damage, and preserve the shape of the eye when using shackles and hooks. Always ensure that you have the correct thimble for the size of rope being used, for any intermediate size the next size must be used. Thimbles are not load rated and only serve to protect the rope. Always inspect thimbles for abuse, damage, cracks and deformation (stretch) before use. Thimbles can be used for wire or synthetic rope.

ProCraft Galvanized Heavy Duty Thimbles


Heavy duty thimbles should be used for any lifting or load bearing applications. These heavy duty thimbles are galvanized and ideal for use in wire rope slings, winch lines and other wire or synthetic rope terminations. Hot dipped galvanized to US Federal Specification FF-T-276 Type III

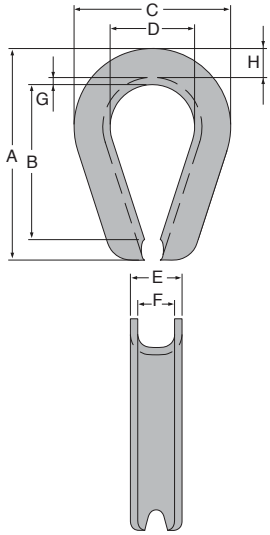

Stock Code	Wire Rope Diameter	Dimension Inches								Weight per Piece Pounds
		A	B	C	D	E	F	G	H	
76HD-G08	1/4	2.19	1.62	1.50	0.88	0.41	0.28	0.06	0.25	0.08
76HD-G10	5/16	2.50	1.88	1.81	1.06	0.50	0.34	0.08	0.30	0.14
76HD-G12	3/8	2.88	2.12	2.12	1.12	0.63	0.41	0.11	0.39	0.26
76HD-G14	7/16	3.25	2.38	2.38	1.25	0.72	0.47	0.12	0.45	0.35
76HD-G16	1/2	3.62	2.75	2.75	1.50	0.89	0.59	0.15	0.48	0.44
76HD-G20	5/8	4.25	3.25	3.12	1.75	1.00	0.66	0.16	0.53	0.74
76HD-G24	3/4	5.00	3.75	3.81	2.00	1.22	0.78	0.22	0.69	1.47
76HD-G28	7/8	5.50	4.25	4.25	2.25	1.38	0.94	0.22	0.78	1.50
76HD-G32	1	6.12	4.50	4.75	2.50	1.56	1.06	0.25	0.88	2.25
76HD-G3640	1 1/8 to 1 1/4	7.00	5.12	5.88	2.88	1.88	1.31	0.25	1.25	3.70
76HD-G4044	1 1/4 to 1 3/8	9.08	6.50	6.81	3.50	2.25	1.44	0.37	1.29	8.17
76HD-G4448	1 3/8 to 1 1/2	9.00	6.50	7.12	3.50	2.62	1.56	0.50	1.31	12.14
76HD-G56	1 3/4	12.19	9.00	8.50	4.50	3.06	1.84	0.50	1.50	18.60
76HD-G64	2	15.12	12.00	10.38	6.00	3.38	2.09	0.50	1.69	27.80

ProCraft Stainless Steel Heavy Duty Thimbles

Heavy duty thimbles should be used for any lifting or load bearing applications. These heavy duty thimbles are stainless steel and ideal for use in wire rope slings, winch lines and other wire or synthetic rope terminations. The Stainless Steel finish make them ideal for many marine applications. Type 316 to US Federal Specification FF-T-276 Type III



Stock Code	Wire Rope Diameter	Dimension Inches								Weight per Piece Pounds
		A	B	C	D	E	F	G	H	
76SS-HD08	1/4	2.19	1.62	1.50	0.88	0.41	0.28	0.06	0.25	0.08
76SS-HD10	5/16	2.50	1.88	1.81	1.06	0.50	0.34	0.08	0.30	0.14
76SS-HD12	3/8	2.88	2.12	2.12	1.12	0.63	0.41	0.11	0.39	0.25
76SS-HD16	1/2	3.54	2.38	2.63	1.46	0.84	0.53	0.15	0.48	0.44
76SS-HD20	5/8	4.25	3.25	3.12	1.75	1.00	0.66	0.16	0.53	0.75
76SS-HD24	3/4	5.00	3.75	3.81	2.00	1.22	0.78	0.22	0.69	1.20
76SS-HD28	7/8	5.50	4.25	4.25	2.25	1.38	0.94	0.22	0.78	1.85
76SS-HD32	1	6.12	4.50	4.75	2.50	1.56	1.06	0.25	0.88	2.20